

# AQUAPORIN INSIDE® DWRO™ MEMBRANES

Drinking Water Reverse Osmosis Element



- ✓ Revolutionary high water flow for most efficient water treatment
- ✓ Enables water treatment with low energy consumption
- ✓ High rejection of harmful pollutants ensures safe and healthy drinking water
- ✓ Manufactured using Nature's water channels

## PRODUCT TYPE

The Aquaporin Inside® Drinking Water Reverse Osmosis (DWRO™) membrane element is produced with aquaporin proteins, Nature's own water filter. It is the aquaporin protein that provides Aquaporin Inside® membranes with its unique properties.


All Aquaporin Inside® DWRO™ membranes are available in standard configurations and can easily fit into any point-of-use residential or commercial RO system.

## PRODUCT SPECIFICATIONS

Product name	DWRO™ 1812-100
Permeate flow rate	100 GDP / 15.8 L/h
Minimum NaCl rejection	96 %
Typical NaCl rejection	98 %
Applied pressure	60 psi
Recovery	15 %

The stated product performances are based on 250 ppm NaCl solution at 25°C / 77°F. Individual element permeate flow rate may vary ±15%.

**ELEMENT DIMENSIONS**

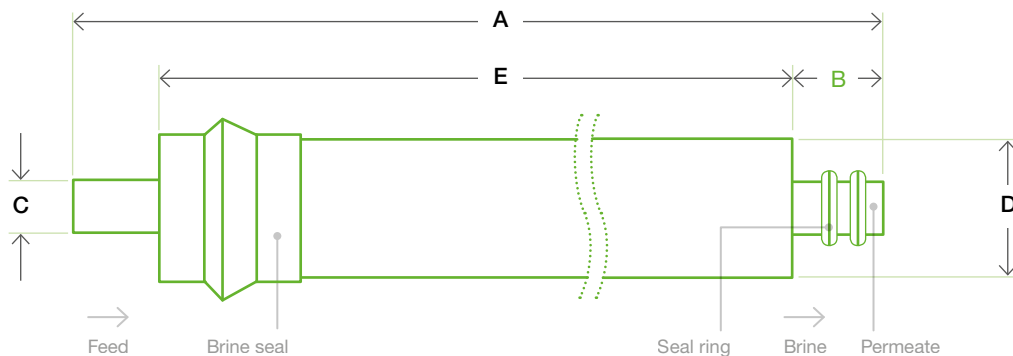

Dimensions (inches / millimeters)

Product name	A	B	C	D	E
DWRO™ 1812-100	11.73 / 298.0	0.87 / 22.0	0.67 / 17.0	1.73 / 44.0	9.25 / 235

Aquaporin A/S reserves the right to change specifications without prior notice.

DWRO™ 1812-100 elements fit standard 1812 pressure vessels with nominal 52 mm (2.05 inches) inner diameter.

**OPERATING SPECIFICATIONS**

Maximum operating pressure	125 psi (8.6 bar)	Maximum feed water turbidity	1 NTU
Maximum operating temperature	45°C (113°F)	Operating pH range	3-10
Maximum feed flow rate	2.0 gpm (450 L/h)	Cleaning pH range	2 - 11 (25 °C)
Maximum feed water SDI	5 (15 min)	Free chlorine tolerance	< 0.1 ppm

**ADDITIONAL INFORMATION**

- ✓ Permeate from the first hour of operation should be discarded.
- ✓ To prevent biological growth during prolonged system shutdowns, it is recommended that membrane elements be immersed in a preservative solution. Rinse out the preservative solution before use. See Aquaporin’s storage recommendations for DWRO™ elements for more details.
- ✓ Elements contained in the boxes must be kept dry at room temperature (7-32°C / 40-95°F) and should not be stored in direct sunlight.
- ✓ Keep elements moist at all times after initial wetting.
- ✓ The presence of free chlorine and other oxidizing agents can cause premature membrane failure. Since oxidation damage is not covered under warranty, Aquaporin A/S recommends removing residual free chlorine by pretreatment prior to membrane exposure.
- ✓ The information provided in this document is for informative purposes only. It is the responsibility of the user to ensure appropriate usage of this product. Aquaporin A/S assumes no obligation, liability, or damages incurred for the misuse of the product or for the information provided in this document. This document does not express or implies any warranty as to the merchantability or fitness of the products.

Aquaporin A/S  
 Nymøllevvej 78  
 2800 Kongens Lyngby  
 Denmark

Phone: +45 8230 3082  
 sales@aquaporin.com  
 aquaporin.com

