

AQUAPORIN INSIDE® DWRO™ MEMBRANES

Drinking Water Reverse Osmosis element



- ✓ Revolutionary high water flow for most efficient water treatment
- ✓ Enables water treatment with low energy consumption
- ✓ High rejection of harmful pollutants ensures safe and healthy drinking water
- ✓ Manufactured using Nature's own water filters

PRODUCT TYPE

The Aquaporin Inside® Drinking Water Reverse Osmosis (DWRO™) membrane element is produced with aquaporin proteins, Nature's own water filters. It is the aquaporin protein that provides Aquaporin Inside® membranes with their unique properties.


All Aquaporin Inside® DWRO™ membranes are available in standard configurations and can easily fit into any conventional point-of-use residential or commercial RO system.

PRODUCT SPECIFICATIONS

Product name	DWRO™ 3012-500
Permeate flow rate	500 GDP / 79 L/h
Minimum NaCl rejection	95 %
Typical NaCl rejection	97 %
Applied pressure	80 psi
Recovery	40 %

The stated product performances are based on 250 ppm NaCl solution at 25°C / 77°F. Permeate flow rate and typical rejection are stated after 24 hours of stabilization. Individual element permeate flow rate may vary ±15%.

ELEMENT DIMENSIONS

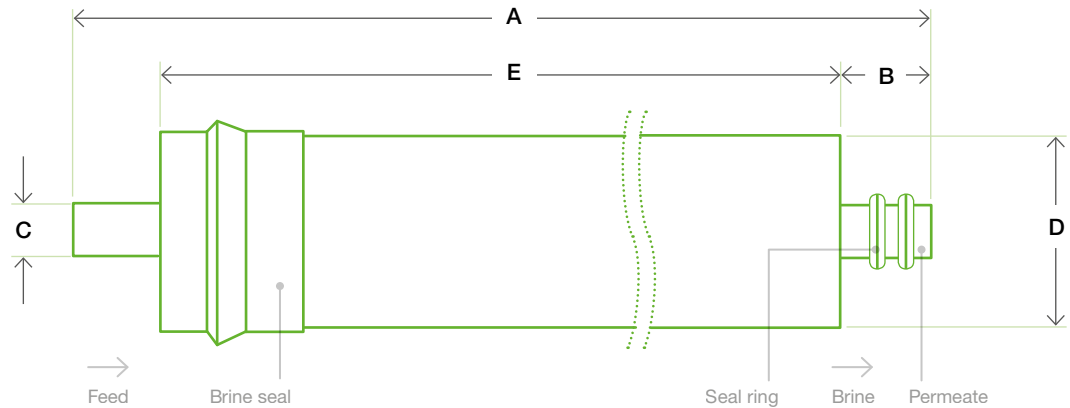

Dimensions (inches / millimeters)

Product name	A	B	C	D	E
DWRO™ 3012-500	11.73 / 298.0	0.87 / 22.0	0.67 / 17.0	2.91 / 74.0	9.25 / 235

Aquaporin A/S reserves the right to change specifications without prior notice.
 DWRO™ 3012-500 elements fit standard 3012 pressure vessels with nominal 80 mm (3.15 inches) inner diameter.

OPERATING SPECIFICATIONS

Maximum operating pressure	145 psi (10 bar)	Maximum feed water turbidity	1 NTU
Maximum operating temperature	45 °C (113 °F)	Operating pH range	3-10
Maximum feed flow rate	2.5 gpm (570 L/h)	Cleaning pH range	2 - 11 (25 °C)
Maximum feed water SDI	5 (15 min)	Free chlorine tolerance	< 0.1 ppm

ADDITIONAL INFORMATION

- ✓ Permeate from the first hour of operation should be discarded. Do not use this initial permeate for drinking or food preparation.
- ✓ To prevent biological growth during prolonged system shutdowns, it is recommended that membrane elements be immersed in a preservative solution. Rinse out the preservative solution before use.
- ✓ Elements contained in the boxes must be kept dry at room temperature (7-32 °C / 40-95 °F) and should not be stored in direct sunlight.
- ✓ Keep elements moist at all times after initial wetting.
- ✓ Surface and color variations may occur on the flat sheet membrane but will not affect the performance.
- ✓ The presence of free chlorine and other oxidizing agents can cause premature membrane failure. Since oxidation damage is not covered under warranty, Aquaporin A/S recommends removing residual free chlorine by pretreatment prior to membrane exposure.
- ✓ The information provided in this document is for informative purposes only. It is the responsibility of the user to ensure appropriate usage of this product. Aquaporin A/S assumes no obligation, liability, or damages incurred for the misuse of the product or for the information provided in this document. This document does not express or implies any warranty as to the merchantability or fitness of the products.

Aquaporin A/S
 Nymøllevej 78
 2800 Kongens Lyngby
 Denmark

Phone: +45 8230 3082
 sales@aquaporin.com
 aquaporin.com

